

MILAN S.r.l. a socio unico


Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet **FirestoP®** **tasker® TSK 1038 AR -2x0,35 mm²**



DMX Digital Audio 110 Ohm Cable AES/EBU – Outdoor Use

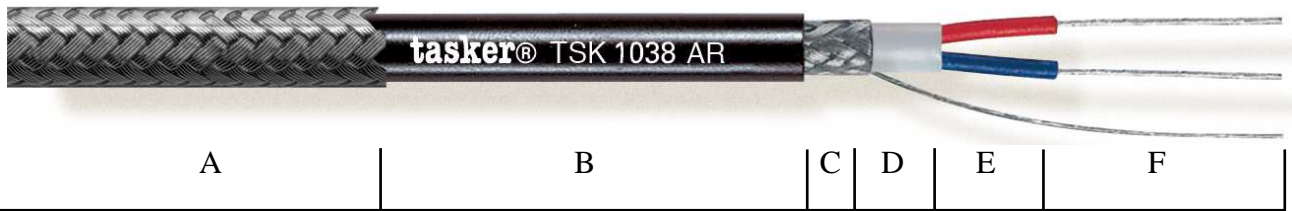

CATEGORY Digital Audio Cable (See Audio Catalogue)
APPLICATIONS Digital Audio Applications and DMX Light

- A:** Anti rodents **galvanized steel Armor** specific for underground installation. Outer Diam. Ø 7,10 (±0,20) mm.
- B:** Black **Flame Retardant PVC** sheath. Diam. Ø 6,10 (±0,20) mm.
- C:** Shielding O.F.C. tinned copper Braid covering 85% + O.F.C. tinned copper Drain Wire.
- D:** Waste filler between conductors and total taping in not woven polyester.
- E:** Core Insulation with PPE, colored one Red and one Blue. Diam. Ø 1,60 mm (±0,20) mm.
- F:** O.F.C. tinned copper formation 11x0,20 mm. Nom. Cross section 2x0,35 mm².

MARKING **tasker® TSK 1038 AR 2x0,35 mm² O.F.C. Digital 110 Ω DMX Audio Cable FirestoP® - Outdoor Use – Made in Italy**

CUSTOM PRODUCTION This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

Cable Properties

Conductor Resistance	58 Ω/Km
Capacity Core/Core	55 pF/mt
Capacity Core/Shield	62 pF/mt
Impedance	110 Ω
Max Rated Voltage	49 V
Operative Temperature	-20/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 26.05.17
	X	Outdoor	Esterno			Mobile	Mobile			
	X	Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			