


MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet

tasker® TSK 1175 – 3x0,50 +1x0,75 mm² O.F.C Led Cable + Power

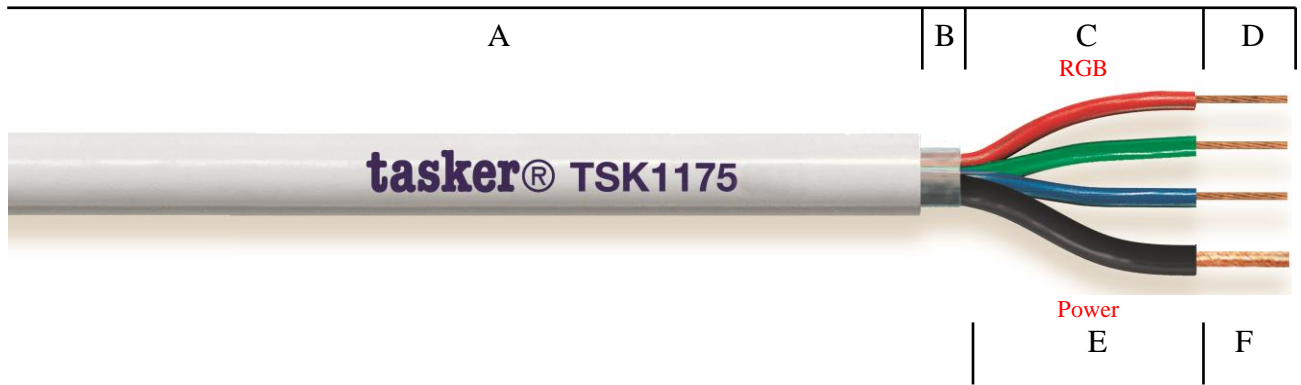

CATEGORY LED Cable (See Electronics Catalogue)
APPLICATIONS Electronics and LED alimention

- A:** Soft White **Flame Retardant PVC**
 Outer cable Diam. Ø 6,20 (± 0,20) mm.
- B:** The cores will be stranded in a pair with waste filler between conductors and wrapped with not woven polyester based tape.

RGB Section:

- C:** The three conductors are insulated with PVC, colored Red, Green and Blue.
 Diam. Ø 1,80 (±0,20) mm.
- D:** O.F.C. red copper formation 16x0,20 mm
 Nom. Cross section 3x0,50 mm².

Power Section:

- E:** The conductor is insulated with PVC, color Black.
 Diam. Ø 2,20 (±0,20) mm.
- F:** O.F.C. red copper formation 24x0,20 mm.
 Nom. Cross section 1x0,75 mm²

MARKING tasker® Led Cable – RGB - FirestoP® - Made In Italy
CUSTOM This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR.**
PRODUCTION

MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Cable Properties

RGB Conductor Resistance	38,00 Ω/Km
Power Conductor Resistance	21,93 Ω/Km
Max Rated Voltage	49 V
Operative Temperature	-20/+70°C

USE	X	Indoor	Interno Edificio
Impiego		Outdoor Limited	Esterno Limitato
		Outdoor	Esterno
		Outdoor Direct Burial	Esterno Interrato

INSTALLATION	X	Fixed	Fissa
Posa	X	Restricted Mobile	Mobile Limitata
		Mobile	Mobile
		Mobile in Drag Chain	Mobile in Catena

INFORMATION	X	RoHS2 Compliant
Informazioni	X	Ver. A / 15.02.18
10% measurement tolerance, unless otherwise indicated.		