

MILAN S.r.l. a socio unico


Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it



Technical Datasheet

tasker® C218 – 16x0,25 mm² - LiYCY Cable

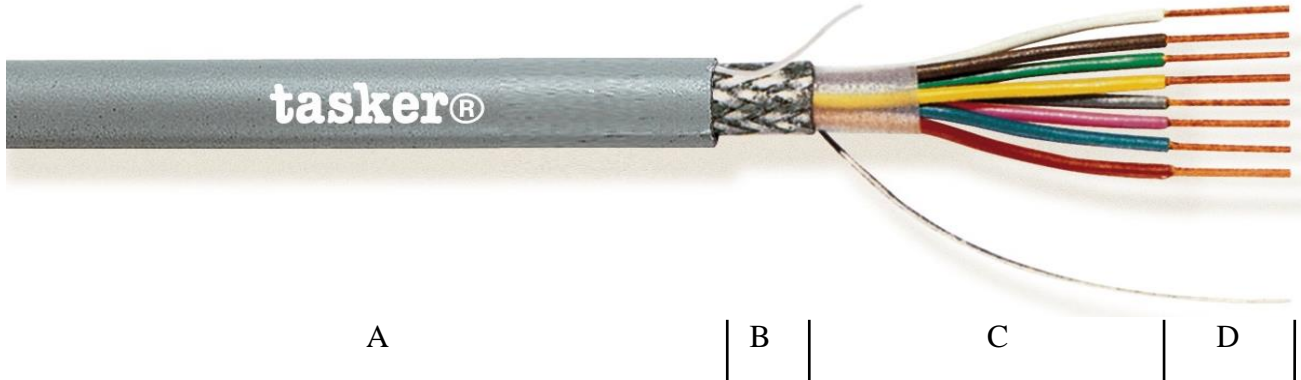

NOTE
CATEGORY
APPLICATIONS

The picture don't represent the real number of conductors.
 Shielded Cable (See Data Network Catalogue)
 Data transmission and electronics

- A:** Grey Soft **PVC** Sheath. Outer cable Ø: 9,00 (±0,20) mm.
- B:** Braided Shielding in O.F.C. Tinned Copper, covering 85% + Drain Wire.
- C:** Cores Insulation with Soft **PVC**– DIN 47100 Standards.
 Color Code: White, Brown, Green, Yellow, Grey, Pink, Blue, Red, Black, Violet, Grey/Pink, Red/Blue, White/Green, Brown/Green, White/Yellow, Yellow/Brown. Diam. Ø 1,30 (±0,20) mm.
- D:** Stranded with waste filler between conductors and wrapped with Mylar Tape.
 Stranded O.F.C. Red Copper formation 14x0,15 mm.
 Nom. Cross section 14x0,25 mm².

MARKING

tasker® C218 LiYCY 16x0,25 mm² – Low Voltage Computer Cable –
 Made in Italy

CUSTOM
PRODUCTION

This product may be custom produced also in **L.S.Z.H.** polymer, **PE**, **PUR**, with or without Metallic Armor.

Cable Properties

Conductor Resistance	75,85 Ω/Km
Capacity Core/Core	70 pF/m
Capacity Core/Shield	150 pF/m
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Flexible Limited	Flessibilità limitata	Informazioni	X	Ver. A / 08.07.2016
		Outdoor	Esterno			Dynamic (Drag Chain)	Mobile in Catena			
		Outdoor Direct Burial	Esterno Interrato			Dynamic (Torsion)	Mobile in Torsione			