

MILAN S.r.l. a socio unico

Head Office – Export department:
Viale Europa, 74
20090 Cusago (MI) Italy
T. +39 02 9039.4556-4158
F. +39 02 9039.4551
www.taskercables.com


Ufficio Commerciale e Centro Distribuzione
Viale Europa 72 Strada F12
20090 Cusago (MI) Italy
T. +39 02 9039.0037-0059
F. +39 02 9039.0049
www.tasker.it



Technical Datasheet tasker® C722 CPR B2ca



SF/UTP Cat.6 Cable for Fix Installation

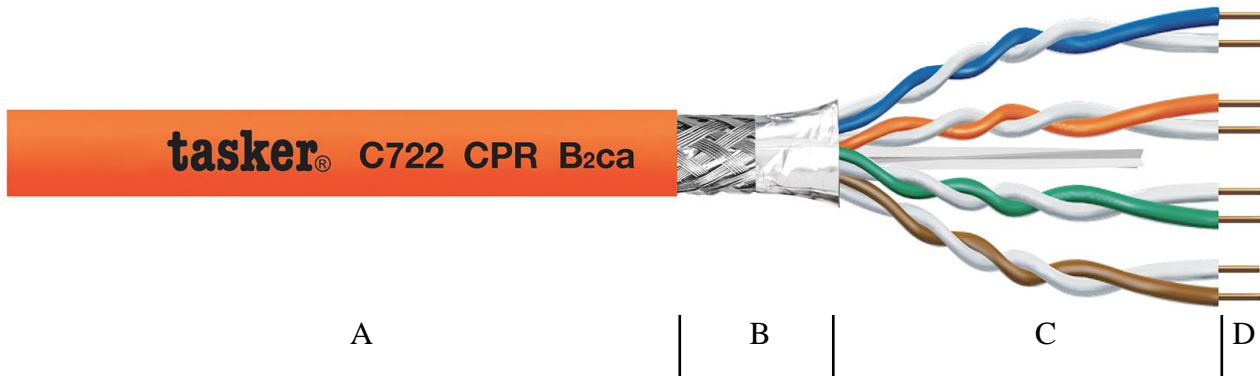

CATEGORY LAN and Data Transmission (See News Brochure)
APPLICATIONS LAN cabling, Digital A/V over Cat. Cables for fix installation

- A:** Orange **L.S.Z.H.** sheath. RAL 2003. Flame Retardant and Halogen Free. Outer Diam. Ø 7,50 (±0,20) mm.
- B:** O.F.C. tinned copper braid shield covering 55% + Al/PET tape covering 100%
- C:** The four pairs are stranded together with polyester based tape around PE cross central filler. Foam-skin PE core insulation. Diam. Ø 1,15 mm. Core Colors: white-blue/blue, white-orange/orange, White-green/green, white-brown/brown.
- D:** Stiff Wire in O.F.C. red copper - formation 1x0,57 mm. 23/1 AWG. Nom. Cross section 4x2x0,25mm².

MARKING **tasker®** C722 CPR B2ca – 4x2x0,25 mm² - 23/1 AWG - S.F./U.T.P. Cat.6 LAN Cable for Fix Installation – 0987- B2ca-s1a-d0-a1 – 2020 – O.F.C. – L.S.Z.H. - Halogen Free - FirestoP® - Made in Italy

Cable Properties

Conductor Resistance	74,50 Ω/Km	Capacity Core/Core	46 pF/m
Impedance	100 Ω	Propagation Velocity	75%
Max Rated Voltage	49 V	Propagation Delay	460 ns/100m
Operative Temperature	-30/+70°C	Max Delay Skew	25 ns/100 m

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa		Restricted Mobile	Mobile Limitata	Informazioni	X	CPR B2ca Compliant
		Outdoor	Esterno			Mobile	Mobile			Ver. A / 03.03.20
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			