

MILAN S.r.l. a socio unico


**Head Office – Export department:**  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

**Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it

## Technical Datasheet



# tasker® FROR5150 – 5x1,50 mm<sup>2</sup> Power Cable 450/750 V.

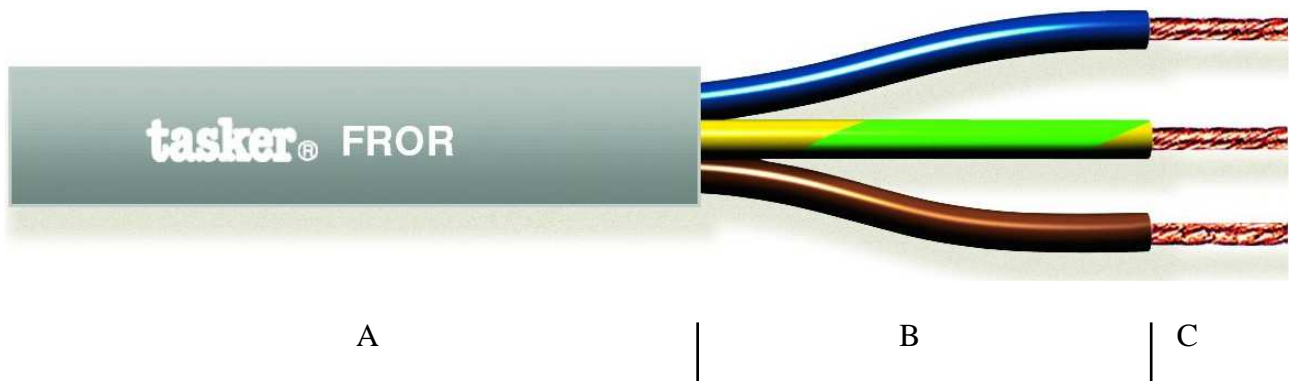

**NOTE**  
**CATEGORY**  
**APPLICATIONS**

The picture do not represent the real number of conductors  
 Power Cable (See Electronics Catalogue)  
 Energy and electrical installation.

- A:** Grey Flame Retardant **PVC** Sheath with reduced emission of corrosive Gases. Outer cable diam. Ø 12,00 (±0,20) mm.
- B:** Core Insulation with Flame Retardant **PVC** with reduced emission of corrosive Gases. Nom. Ø: 2,80 (±0,20) mm.  
 Color code: blue, brown, yellow/green, black, grey.
- C:** O.F.C. red copper formation with 0,25 mm elementary wires.  
 Nom. Cross section 5x1,50 mm<sup>2</sup>.

**MARKING**

**tasker®** FROR 5150 5x1,50 Energy Cable - CEI 20-22/II IEMMEQU FROR  
 450/750V - 5x1,50 mm<sup>2</sup>

**Cable Properties**

<b>Conductor Resistance</b>	13,30 Ω/Km
<b>Max Rated Voltage U<sub>0</sub>/U</b>	450/750 V
<b>Operative Temperature</b>	-15/+70°C

<b>USE</b>	<b>X</b>	Indoor	Interno Edificio	<b>INSTALLATION</b>	<b>X</b>	Fixed	Fissa	<b>INFORMATION</b>	<b>X</b>	RoHS2 Compliant
<b>Impiego</b>	<b>X</b>	Outdoor Limited	Esterno Limitato	<b>Posa</b>	<b>X</b>	Restricted Mobile	Mobile Limitata	<b>Informazioni</b>	<b>X</b>	Ver. A / 16.05.17
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			