

MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com


Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it



Technical Datasheet

tasker® C128 CPR Eca – 2x0,35 mm²

Low-Capacity Balanced Microphone Cable

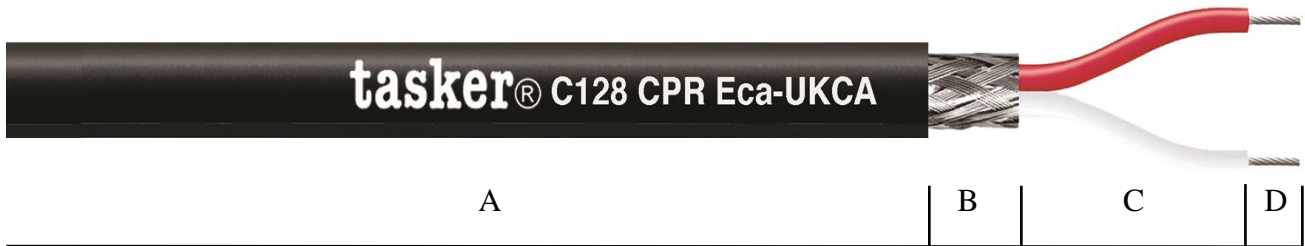

CATEGORY Balanced Microphone Cable (See Audio Catalogue)
APPLICATIONS Audio and Microphone on Fix Installation

- A:** Black Flame Retardant **PVC** Sheath.
Outer cable Diam. Ø 6,10 (±0,20) mm.
- B:** Braided Shielding O.F.C. tinned copper covering 85%.
- C:** The cores are stranded in a pair with two Flame Retardant PVC filler.
Cores insulation in Flame Retardant **PVC**, colored one red and one white.
- D:** Diam. Ø 1,70 (±0,20) mm.
- E:** One conductor in O.F.C. red copper and one in O.F.C. tinned copper.
formation 11x0,20 mm. Nom. Cross section 2x0,35 mm².

MARKING **tasker®** C128 CPR 2x0,35 mm² - 0051-CPR-0753 – 2017 – Eca – 2661 - UKCA - 2022 - O.F.C. – Audio Cable for Fix Installation – FirestoP® - Made in Italy

Cable Properties

Conductor Resistance	58 Ω/Km
Capacity Core/Core	55 pF/m
Capacity Core/Shield	92 pF/m
Max Rated Voltage	49 V
Operative Temperature	-20/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS3 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	UKCA Compliant
		Outdoor	Esterno			Mobile	Mobile			Ver. C / 21.03.22
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			