


Technical Datasheet

tasker® C278 – 8x2x0,08 mm²

Extra Flex Multipair Audio Cable

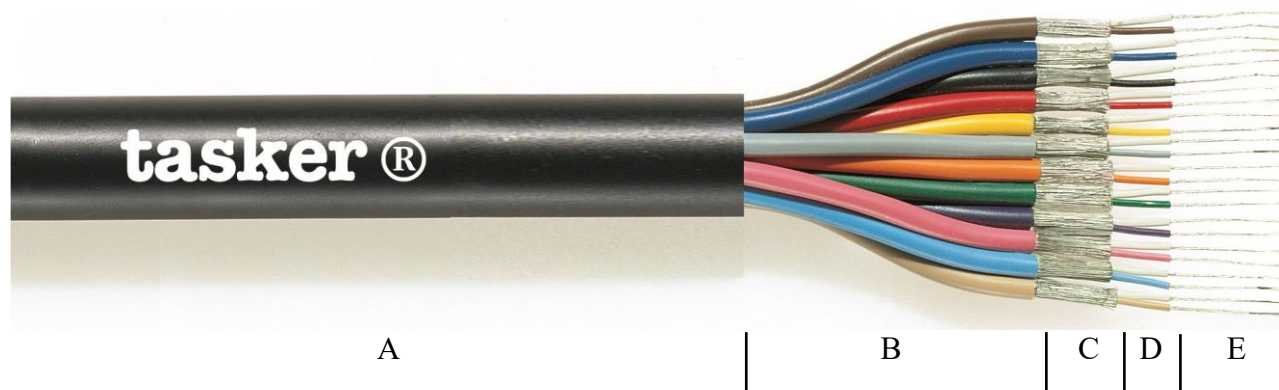

NOTE

CATEGORY

APPLICATIONS

The picture don't represent the real number of conductors.
Multipair Audio Cable (See Audio Catalogue)
Audio Mixers, Benches and Audio Balanced multi sockets.

- A:** Black Soft PVC Sheath. Outer cable Ø: 12,20 (±0,10) mm.
- B:** The single pair are isolated with PVC. Nom. Diam. Ø 2,90 (±0,10) mm.
Color Code: Brown, Blue, Black, Red, Yellow, Grey, Orange, Green.
- C:** The single pair are shielded with O.F.C. tinned copper spiral, covering 100%
- D:** The single cores are insulated with PVC.
Nom. Diam. Ø 0,90 (±0,10) mm.
Color Code: White-Brown, White-Blue, White-Black, White-Red, White-Yellow, White-Grey, White-Orange, White-Green.
- E:** O.F.C. tinned copper formation 12x0,10 mm
Nom. Cross section 8x2x0,08 mm².

MARKING

CUSTOM

PRODUCTION

tasker® C278 8x2x0,08 – 16 AWG O.F.C. MULTIPAIR AUDIO CABLE
This product may be custom produced also in L.S.Z.H. polymer, PE, PUR, with or without Metallic Armor.

Cable Properties

Conductor Resistance	203 Ω/Km
Capacity Core/Core	170 pF/m
Capacity Core/Shield	200 pF/m
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 16.05.17
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			