

MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com


Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it



Technical Datasheet

tasker® C302 – 2x2x0,22 mm²

Individually Shielded Multipair Cable

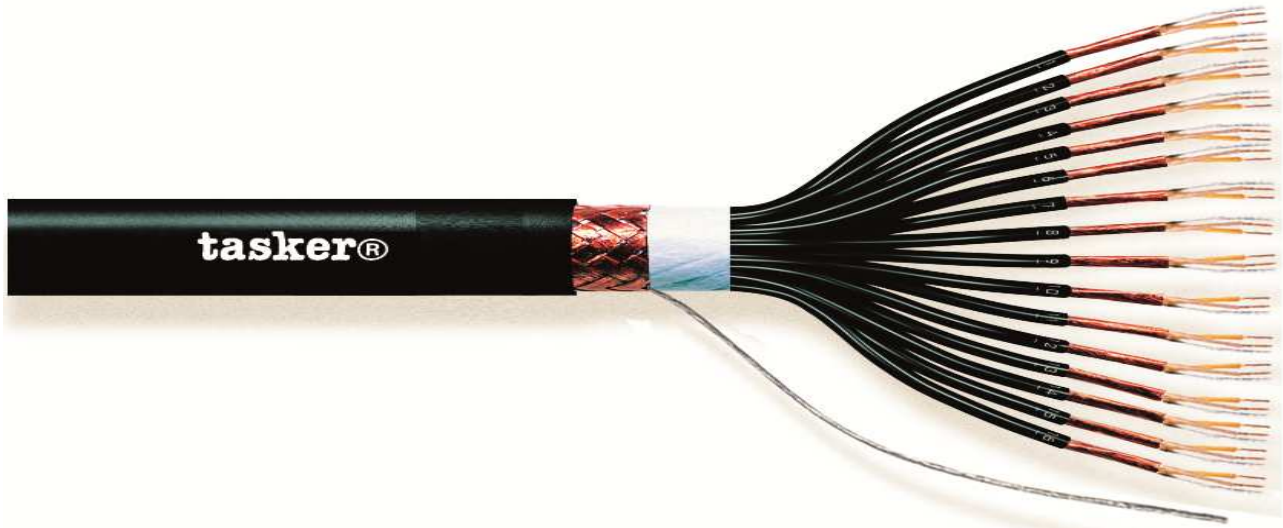

A	B	C	D	E	F	G
---	---	---	---	---	---	---

NOTE
CATEGORY
APPLICATIONS

The picture don't represent the real number of conductors
 Multipair Audio Cable (See Audio Catalogue)
 Audio Mixers, Benches and Audio Balanced multi sockets.

- A:** Black Soft **PVC** Sheath.
Outer cable Ø: 9,00 (±0,20) mm.
- B:** Total Shielding in O.F.C. red copper Braid covering 85%.
+ Tinned Copper Drain Wire.
- C:** Total taping in not woven polyester tape.
- D:** Inner sheaths in PVC, Black and numbered. Diam. Ø 3,00 (±0,20) mm.
- E:** Shielding on each single pair in O.F.C. red copper Spiral, covering 100%.
- F:** Core Insulation with solid PE, colored one Transparent and one Yellow.
Diam. Ø: 1,00 (±0,20) mm.
- G:** O.F.C. red copper formation 28x0,10 mm.
Nom. Cross section 2x2x0,22 mm².

MARKING

C302 2x2x0,22mm² Professional Shielded Multipair Cable for Audio Mixer –
 Made in Italy

MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

CUSTOM PRODUCTION

This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

Cable Properties

Conductor Resistance	79,15 Ω/Km
Capacity Core/Core	75 pF/mt
Capacity Core/Shield	160 pF/mt
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio
Impiego		Outdoor Limited	Esterno Limitato
		Outdoor	Esterno
		Outdoor Direct Burial	Esterno Interrato

INSTALLATION	X	Fixed	Fissa
Posa	X	Restricted Mobile	Mobile Limitata
		Mobile	Mobile
		Mobile in Drag Chain	Mobile in Catena

INFORMATION	X	RoHS2 Compliant
Informazioni	X	Ver. A / 16.05.16