


Technical Datasheet

tasker® C134 TN – 2x4,00 mm²

Flat Divisible Transparent Cable

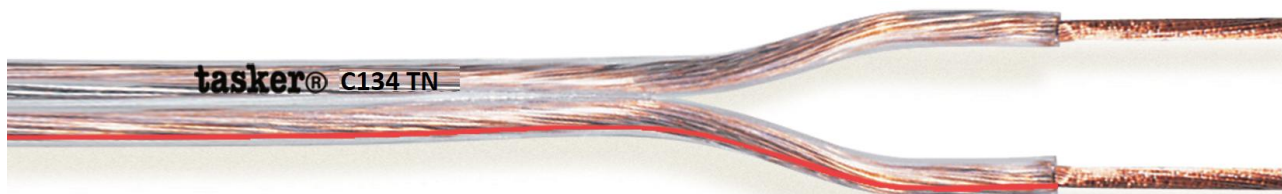

A

B

CATEGORY Flexible Audio Cable (See Audio Catalogue)

APPLICATIONS Speaker and Home Theatre installation

A: Transparent PVC Sheath.
Outer Cable Dimension 4,10 x 8,20 (±0,20) mm.

B: Both conductors are made of OFC red copper.
Special formation realized with elementary wires stranded in beams and stranded again to create the cores 17x7x0,20 mm.
Nominal cross section 2x4,00 mm²

MARKING tasker® C134TN 2x4,00 mm² O.F.C. Speaker Cable

CUSTOM PRODUCTION This product may be custom produced also in L.S.Z.H. polymer, PE or PUR.

Cable Properties

Conductor Resistance	4,31 Ω/Km
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS3 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. B / 16.05.19
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			