

MILAN S.r.l. a socio unico


Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet



tasker® FSC2022 – 2x0,22 mm² Flexible Multi-Conductor Cable

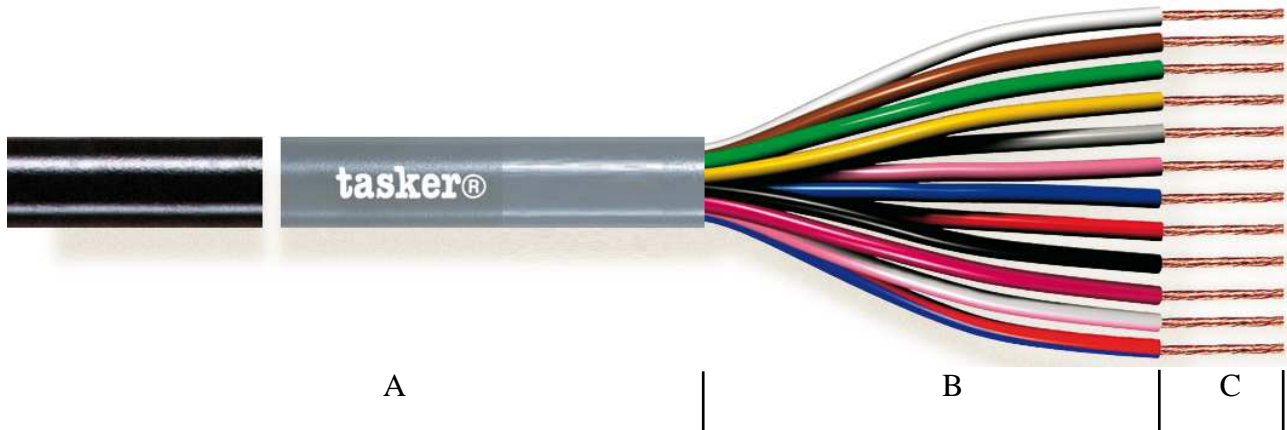

NOTE
CATEGORY
APPLICATIONS

The picture do not represent the real number of conductors.
 Multi Conductor Cable (See Electronics Catalogue)
 Wiring and Electronics.

- A:** Soft **Flame Retardant PVC** available in different color.
Outer cable Diam. Ø 3,50 (±0,20) mm
- B:** Cores Insulation with Soft **Flame Retardant**. DIN 47100 Standards.
Color Code: White, Brown. Diam. Ø 1,10 (±0,20) mm.
- C:** Stranded O.F.C. Red Copper, formation 7x0,20 mm.
Nom. Cross section 2x0,22 mm²

MARKING
CUSTOM
PRODUCTION

tasker® FSC 2022 2x0,22 mm² FLEX SHEATHED CABLE Firestop® Made Italy
 This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR,**
 or Metallic Armored.

Cable Properties

Conductor Resistance	79 Ω/Km
Max Rated Voltage	49 V
Operative Temperature	-20/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Flexible Limited	Flessibilità limitata	Informazioni	X	Ver. A / 11.07.2016
		Outdoor	Esterno			Dynamic (Drag Chain)	Mobile in Catena			
		Outdoor Direct Burial	Esterno Interrato			Dynamic (Torsion)	Mobile in Torsione			