


Technical Datasheet

tasker® C284 – 2x2x0,22 + 3x1,50 mm² DMX 110 Ohm Cable

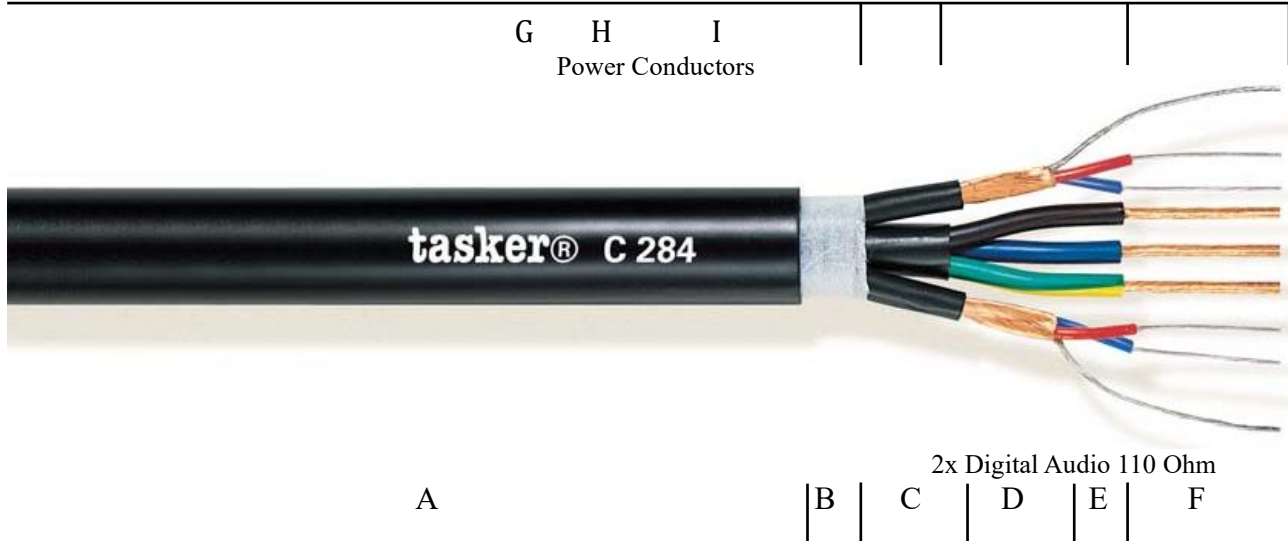

CATEGORY DMX Cable + Power (See Audio Catalogue)

APPLICATIONS Active Digital Audio Cable for professional mobile use and stage.

- A:** Black **Flame Retardant PVC**. Outer cable Diam. Ø 14,70 (±0,20) mm.
B: The single sheaths are stranded with waste filler between conductors and wrapped with not woven polyester tape.

2x Digital Audio 110 Ohm Pairs:

- C:** Black **Flame Retardant PVC**. Diam. Ø 4,00 (±0,20) mm.
D: Shielding O.F.C. red copper Spiral covering 100% + O.F.C. tinned copper Drain Wire.
E: Core Insulation with PEE, colored one Red and one Blue. Diam. Ø 1,50 (±0,20) mm.
F: O.F.C. tinned copper formation 28x0,10 mm. Nom. Cross section 2x2x0,22 mm².

Three Power Conductors:

- G:** Black **Flame Retardant PVC**. Diam. Ø: 7,20 (±0,20) mm.
H: Core Insulation with, **Flame Retardant** colored: Brown, Blue and Yellow/Green. Diam. Ø 3,00 (±0,20) mm.
I: O.F.C. red copper formation 48x0,20 mm. Nom. Cross section 3x1,50 mm².

MILAN S.r.l. a socio Unico

Head Office - Export Department
 Viale Europa, 74
 20047 Cusago (MI) Italy
 Tel. +39 02 9039.4556 - 4158
 www.taskercables.com

Ufficio Commerciale e Distribuzione
 Viale Europa, 72 Strada F12
 20047 Cusago (MI) Italy
 Tel. +39 02 9039.0037 - 0059
 www.tasker.it

Capitale Sociale € 100.000,00 i.v.
 Cod. Fisc. e RIVA/VAT Nr. IT 03835660154
 RE.A. MI 975732 Reg. Imprese MI 178864-5179-14
 PEC: taskerpec@legalmail.it

MARKING
CUSTOM
PRODUCTION

tasker® C284 - 2x2x0,22 + 3x1,5 Digital DMX Cable FirestoP® ITALY
 This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

Cable Properties

Digital Audio Cables Resistance	79,15 Ω/Km
Power Conductor Resistance	12,50 Ω/Km
Capacity Core/Core	50 pF/m
Capacity Core/Shield	95 pF/m
Impedance	110 Ω
Operating Voltage	300 V
Operative Temperature	-20/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. B / 16.04.26
		Outdoor	Esterno		X	Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			