

MILAN S.r.l. a socio Unico


Head Office - Export Department  
Viale Europa, 74  
20047 Cusago (MI) Italy  
Tel. +39 02 9039.4556 - 4158  
www.taskercables.com

Ufficio Commerciale e Distribuzione  
Viale Europa, 72 Strada F12  
20047 Cusago (MI) Italy  
Tel. +39 02 9039.0037 - 0059  
www.tasker.it

Capitale Sociale € 100.000,00 i.v.  
Cod. Fisc. e RIVA/VAT Nr. IT 03835660154  
R.E.A. MI 975732 Reg. Imprese MI 178864-5179-14  
PEC: taskerpec@legalmail.it

## Technical Datasheet

### **tasker® C194 - 3x2x0,22 mm<sup>2</sup>** **Shielded Twisted Pair Cable**

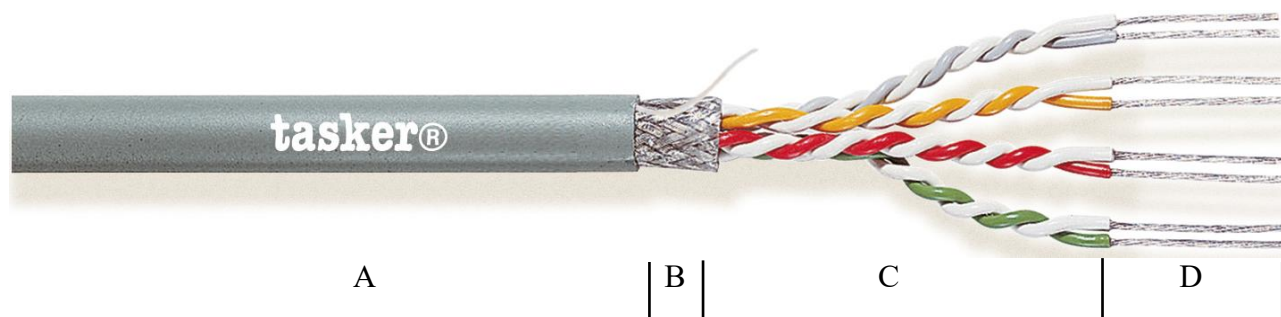

**NOTE**  
**CATEGORY**  
**APPLICATIONS**

The picture does not represent the real number of pairs.  
S.T.P. Cable (See Data Network Catalogue)  
Electronic and Data Transmission

- A:** Grey PVC Sheath.  
Outer cable Ø: 6,60 (±0,20) mm.
- B:** Shielding in O.F.C. tinned copper Braid, covering 85%
- C:** The cores are stranded in a pair with 30 twist/m. and insulation with PVC. Diam. Ø 1,20 (±0,20) mm.  
Pair color code: White/ Grey, White/ Yellow, White/Red.
- D:** O.F.C. tinned copper formation 7x0,20 mm.  
Nom. Cross section 3x2x0,22 mm<sup>2</sup>

**MARKING**

**tasker® C194 3x2x0,22 mm<sup>2</sup> DATA TRASMISSION TWISTED PAIR SHELDED CABLE MADE IN ITALY**

**CUSTOM PRODUCTION**

This product may be custom produced also in **LSZH, PE, PUR**, with or without Metallic Armor.

**Cable Properties**

<b>Conductor Resistance</b>	79,15 Ω/Km
<b>Capacity Core/Core</b>	110 pF/m
<b>Capacity Core/Shield</b>	170 pF/m
<b>Max Rated Voltage</b>	49 V
<b>Operative Temperature</b>	-15/+70°C

<b>USE</b>	X	Indoor	Interno Edificio	<b>INSTALLATION</b>	X	Fixed	Fissa	<b>INFORMATION</b>	X	RoHS2 Compliant
<b>Impiego</b>		Outdoor Limited	Esterno Limitato	<b>Posa</b>	X	Restricted Mobile	Mobile Limitata	<b>Informazioni</b>	X	Ver. A / 16.05.17
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			