


Technical Datasheet

tasker® C102 – 2x4,00 mm²

Red & Black Flat Audio Divisible Cable

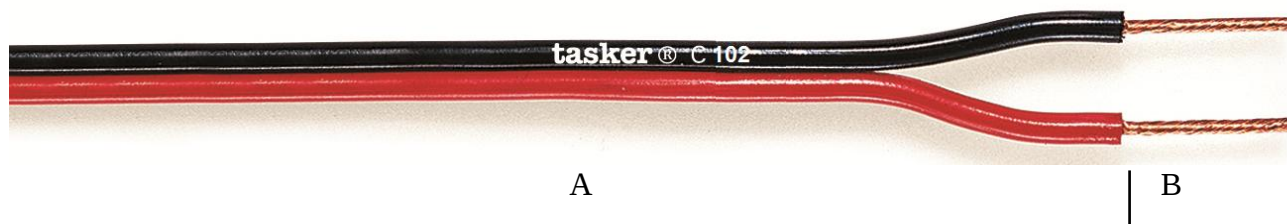

CATEGORY Flat Divisible Red and Black Cable
APPLICATIONS Speakers and Home Theatre installation

A: Soft Red and Black **PVC** sheath.
Outer cable dimension 4,20x8,40 (±0,20) mm.

B: Both conductors in O.F.C. Red Copper.
Stranded formation 56x0,30 mm.
Nominal cross section 2x4,00mm².

MARKING Cable not marked
CUSTOM PRODUCTION This product may be custom produced also in **L.S.Z.H.** polymer, **PE** or **PUR**.

Cable Properties

Conductor Resistance	4,31 Ω/Km
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS3 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. B / 16.05.19
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			